




LL13 Series LED Circular Panels

Round panel with Ultra Slim profile.
SMD technology with opal diffuser to
create natural and uniform illumination.




CE RoHS IP40

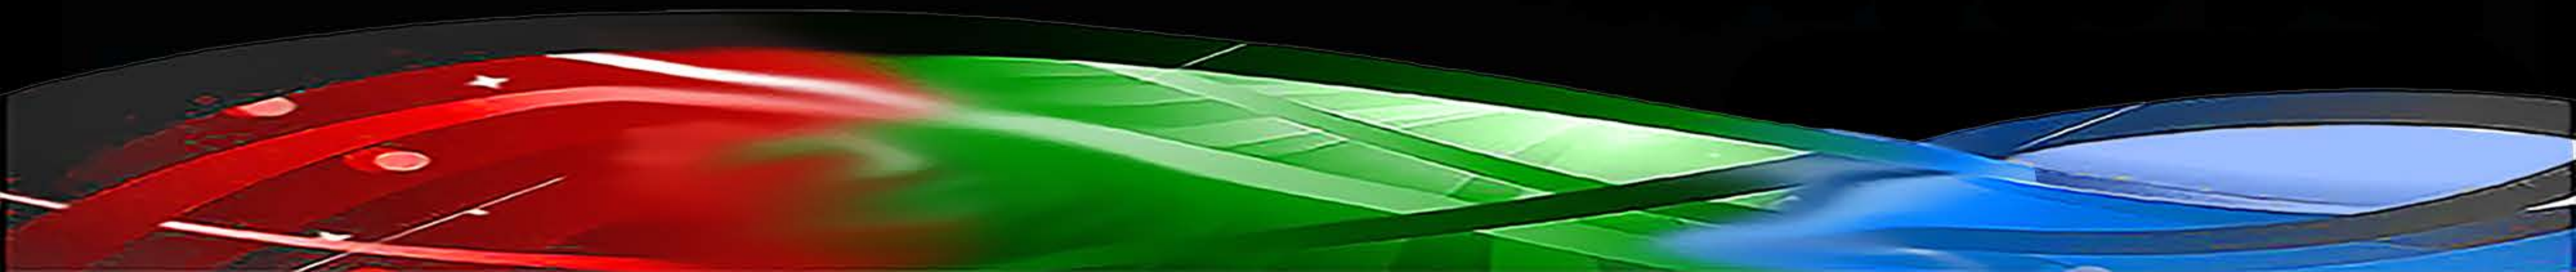

Specifications



Power Consumption	Input Voltage	IP Rating	LED Source	CRI	Colour Temp	Lumens	Beam Angle	Dimmable
10W	AC100-240V 50/60Hz	IP40	3014 SMD	≥80Ra	3000K	680lm	120°	Dimmable versions available
					4000K	700lm		
					5000K	750lm		
15W	AC100-240V 50/60Hz	IP40	3014 SMD	≥80Ra	3000K	1000lm	120°	Dimmable versions available
					4000K	1050lm		
					5000K	1100lm		
20W	AC100-240V 50/60Hz	IP40	3014 SMD	≥80Ra	3000K	1380lm	120°	Dimmable versions available
					4000K	1450lm		
					5000K	1480lm		

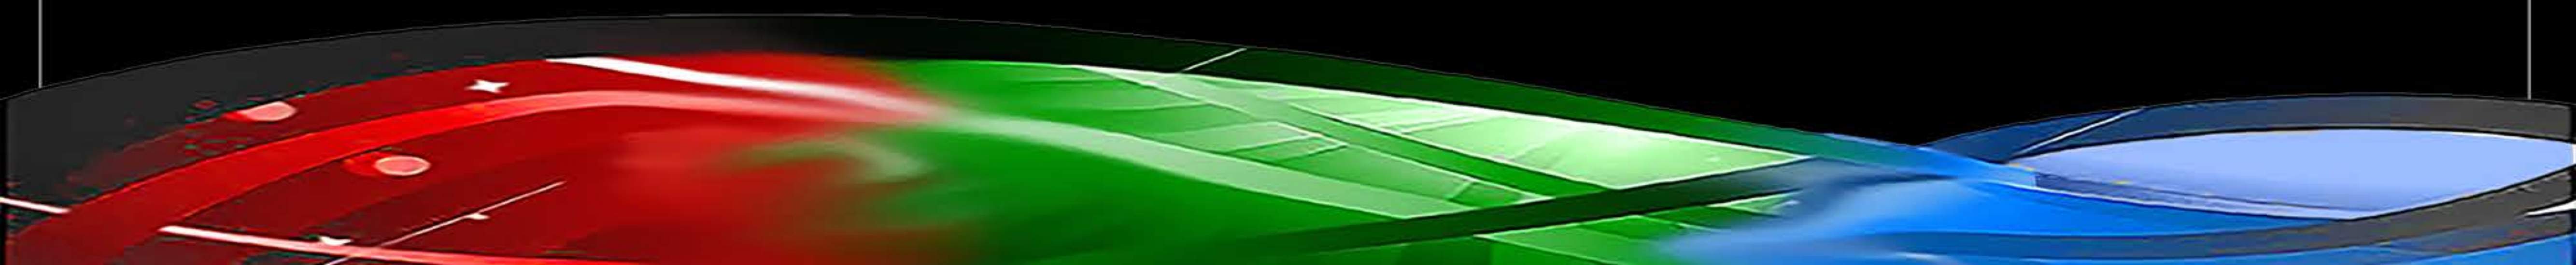

Design



- 1 LED Chips**

Our 3014 SMD chips have a high luminous efficacy, a good colour rendition of $\geq 80Ra$, creating a natural and uniform light source.
- 2 Driver**

The isolated driver is also available in triac, 1-10v and DALI dimming.
Power factor >0.9 . MTBF $>40,000$ hrs. IP40.
- 3 Design Features**

The Ultra Slim profile of this luminaire makes it an ideal choice for all commercial applications. White or Silver bezel available.



Lumilow
Lighting

w. www.lumilow.com

e. sales@lumilow.com

t. +44 (0) 1422 343566

f. +44 (0) 1422 347870

a. Stoney Royd, Swan Bank Lane, Halifax, West Yorkshire, HX3 9HT