




LL14 Series LED Adjustable Downlight

Mini LED Downlight with 25° Adjustable head. COB technology and anti-glare specular reflector creates a natural and uniform level of illumination.

IP54 UGR <19

RoHS CE TÜV

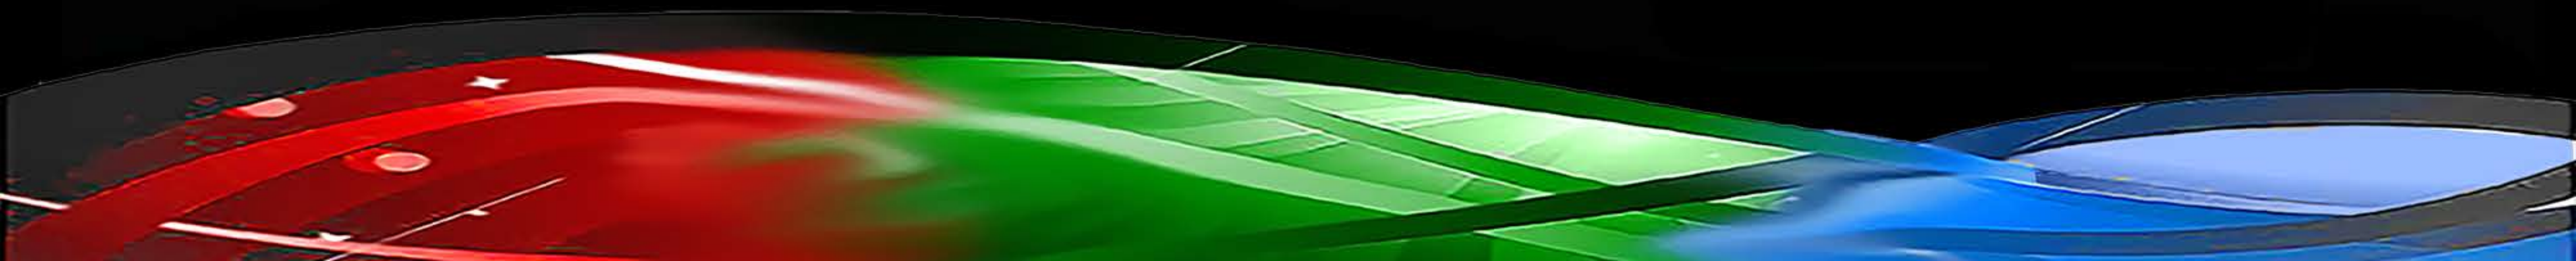


Specifications



Power Consumption	Input Voltage	IP Rating	LED Source	CRI
8W	AC200-240V 50/60Hz	IP54	SHARP COB	≥80Ra

Colour Temperature	Lumens	Beam Angle	Dimmable
2700K	530lm	24°/36°	Dimmable versions available
3000K	550lm		
4000K	590lm		
5000K	600lm		

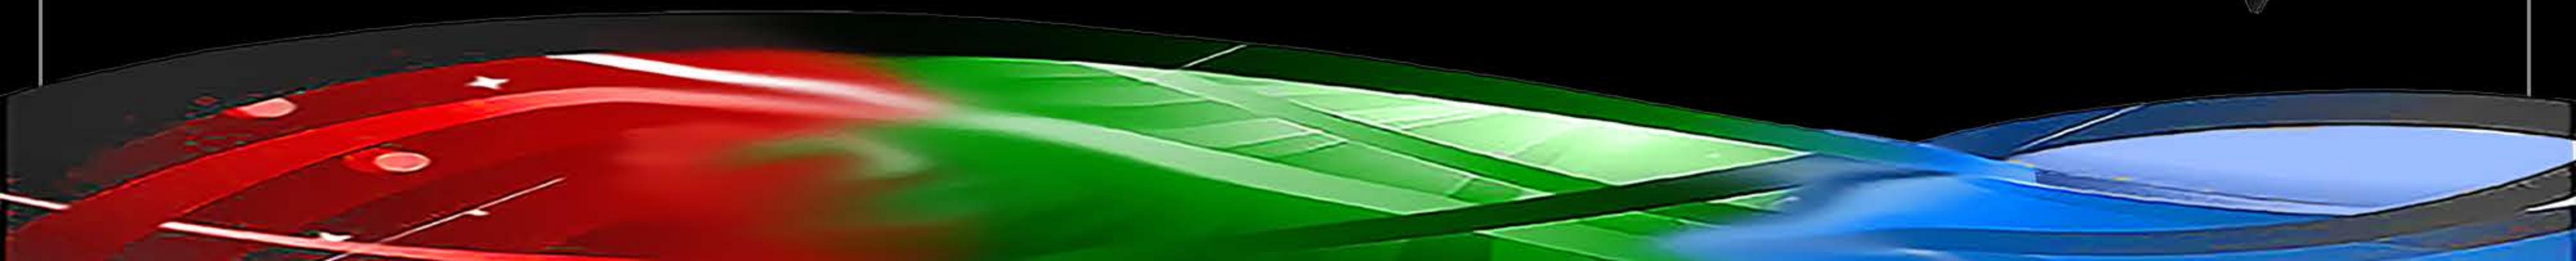

Design



- 1 Driver**
Designed with an external driver to extend service life, also available in 1-10v and Triac dimmable. Power factor >0.9. MTBF >40,000hrs.
- 2 LED Source**
The Sharp LED light source utilises COB technology, a light source which offers high illumination and minimal light decay. CRI >80Ra.
- 3 Design Features**
25 degree flexible rotary head. 24°/36° beam angle. Smart optical design with combination of COB LED and PC reflector, reduces UGR down to <19. IP54 protection against particle and water ingress.
- 4 General Features**
Dimensions - Ø80*50mm cutout 69-74mm. Designed for general lighting applications in offices, supermarkets, shops, schools, hotels, etc.



w. www.lumilow.com

e. sales@lumilow.com

t. +44 (0) 1422 343566

f. +44 (0) 1422 347870

a. Stoney Royd, Swan Bank Lane, Halifax, West Yorkshire, HX3 9HT