




LL19 Series LED Sky Panels

Edge Lit LED recessed decorative panels. Multiple designs available.

UGR < 19

TUV CE RoHS IP20

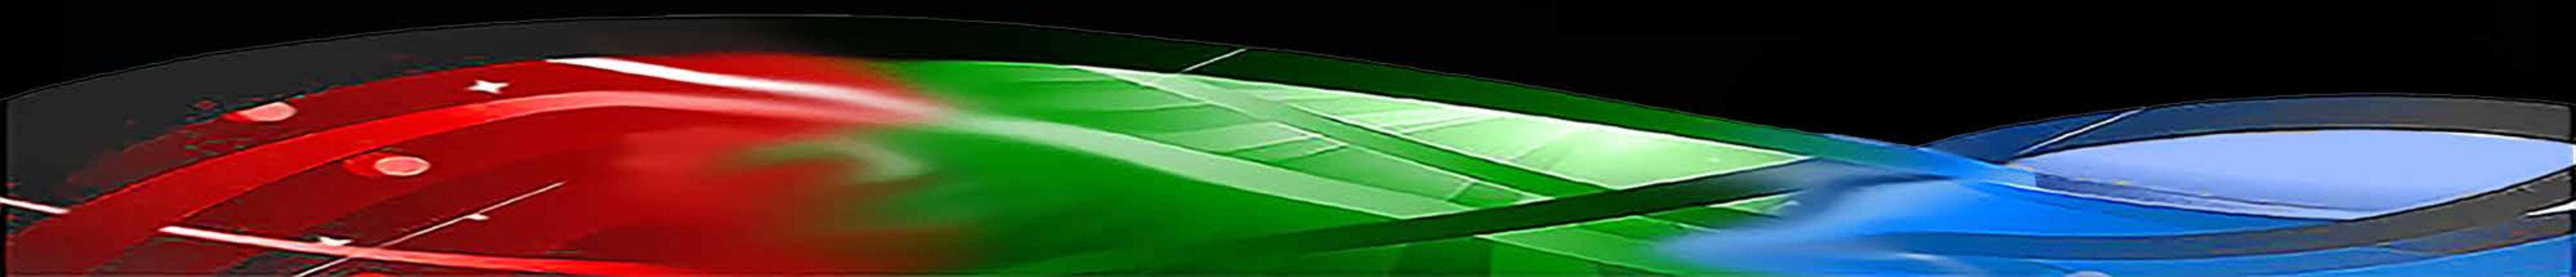


Specifications



Size	Power Consumption	Input Voltage	IP Rating	LED Source	Colour Temp	Lumens*	Dimmable
600x600	38W	AC100-240V 50/60Hz	IP40	OSRAM SMD	3000K 5000K	1400-3000lm	No
1200x300	38W	AC100-240V 50/60Hz	IP40	OSRAM SMD	3000K 5000K	1400-3000lm	No
1200x600	60W	AC100-240V 50/60Hz	IP40	OSRAM SMD	3000K 5000K	1400-3000lm	No

* Lumen Output is dependant on chosen design.

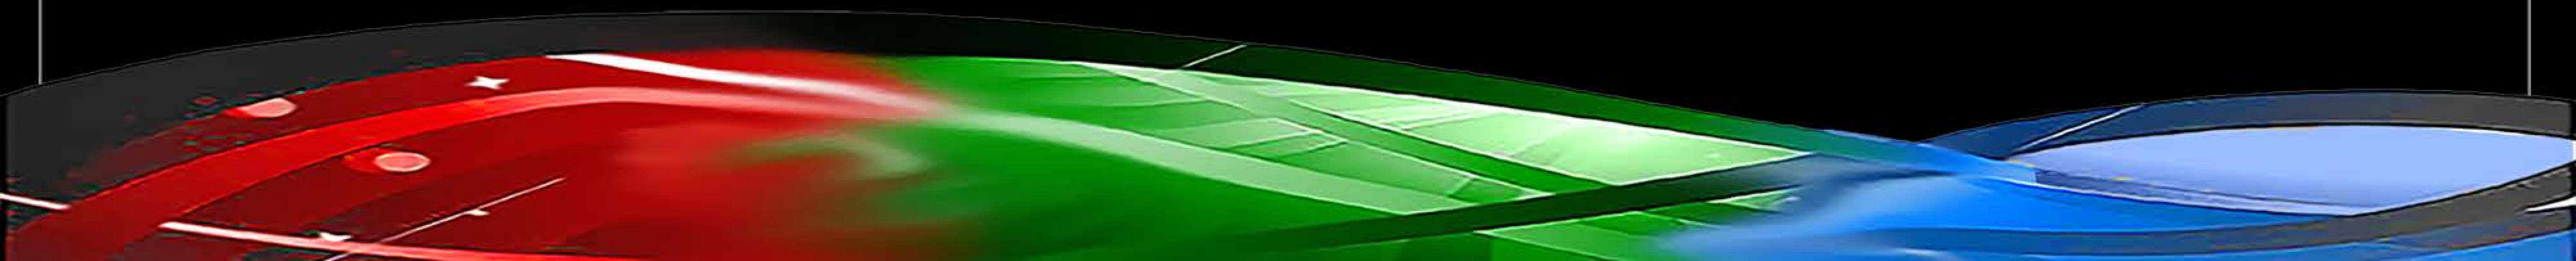

Design



- 1 Driver**
Constant current non dimmable driver.
MTBF 50,000 hours, Power Factor >0.9.
- 2 LED Source**
LED OSRAM DURIS E5 chips. Uniform light distribution, adhering to LM79 and LM80 standards. Lifespan >50,000hrs to L70.
- 3 Heatsink**
Eloxal aluminium frame providing excellent heat dissipation.
- 4 General Design Features**
Lighting and decoration in one, the effect of the skylight in the room creates a feeling of openness. Standard designs consist of 6no LED panels, but other combinations and bespoke designs can be provided..



Lumilow
Lighting

w. www.lumilow.com

e. sales@lumilow.com

t. +44 (0) 1422 343566

f. +44 (0) 1422 347870

a. Stoney Royd, Swan Bank Lane, Halifax, West Yorkshire, HX3 9HT