




LL20 Series LED Track Lights

Adjustable beam angle. Ideal for retail and commercial applications.




RoHS CE IP20

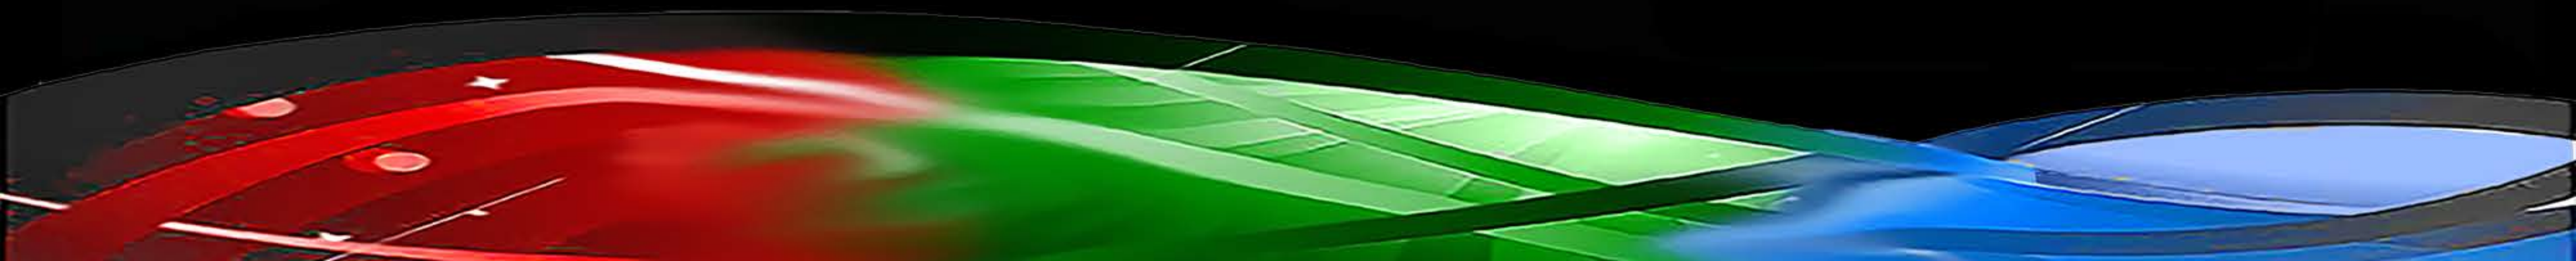

Specifications



Power Consumption	Input Voltage	IP Rating	LED Source	CRI	Colour Temp	Lumen Output	Beam Angle	Dimmable
15W	AC220-240V 50/60Hz	IP20	CREE LED	≥90Ra	3000K	1200lm	38°	Yes
					4000K	1300lm		
					5000K	1300lm		
25W	AC220-240V 50/60Hz	IP20	CREE LED	≥90Ra	3000K	2200lm	38°	Yes
					4000K	2300lm		
					5000K	2300lm		
35W	AC220-240V 50/60Hz	IP20	CREE LED	≥90Ra	3000K	3000lm	38°	Yes
					4000K	3200lm		
					5000K	3200lm		

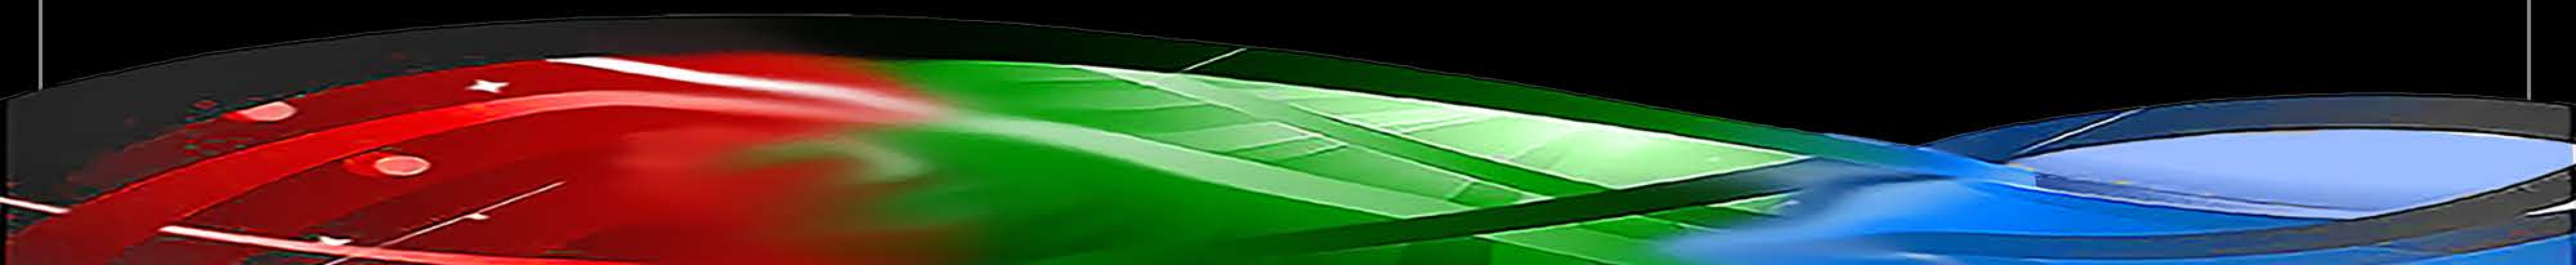

Design



- 1 Driver**
Integral driver, built in active PFC function, Power Factor >0.95 , MTBF $>50,000$ hrs.
- 2 LED Source**
CREE LED chips have a high luminous efficacy, an excellent colour rendition of ≥ 90 Ra, and even light distribution adhering to LM79 and LM80 . Lifespan $>50,000$ hrs to L70 F10.
- 3 Heat Sink**
Aluminium housing for effective, high efficiency heat dissipation.
- 4 General Design Features**
CAMETA lens with anti glare design. IP20 rating. Excellent CRI >90 Ra making this a good replacement for halogen fittings. 1 phase or 3 phase adaptor compatible with Global, Norlux or Nordic track.



w. www.lumilow.com

e. sales@lumilow.com

t. +44 (0) 1422 343566

f. +44 (0) 1422 347870

a. Stoney Royd, Swan Bank Lane, Halifax, West Yorkshire, HX3 9HT