




LL22 Series LED Canopy Light

This smart-fitting can automatically dim to a pre-set level on no activity. Designed for Petrol Station forecourts.

RoHS **CE** **IP66**

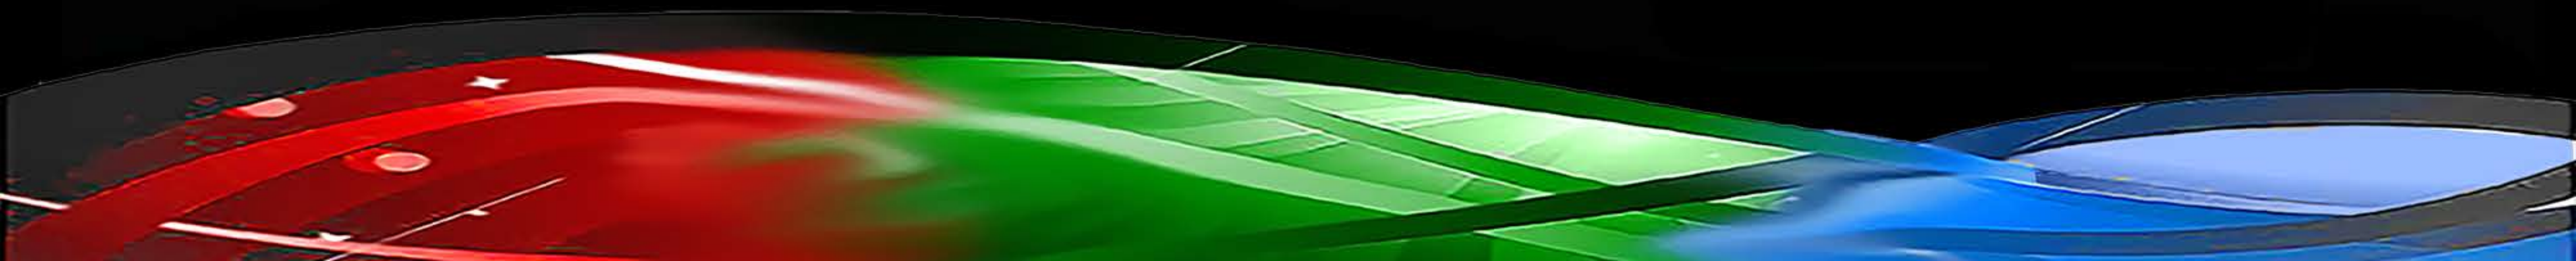


Specifications



Power Consumption	Input Voltage	IP Rating	LED Source	CRI	Colour Temp	Lumen Output	Beam Angle
75W	AC90-305V 50/60Hz	IP66	PHILIPS	≥78Ra	3000K 4000K 5000K	9225lm 9375lm 9525lm	120°
110W	AC90-305V 50/60Hz	IP66	PHILIPS	≥78Ra	3000K 4000K 5000K	13530lm 13750lm 13970lm	120°
150W	AC90-305V 50/60Hz	IP66	PHILIPS	≥78Ra	3000K 4000K 5000K	18450lm 18750lm 19050lm	120°



Design

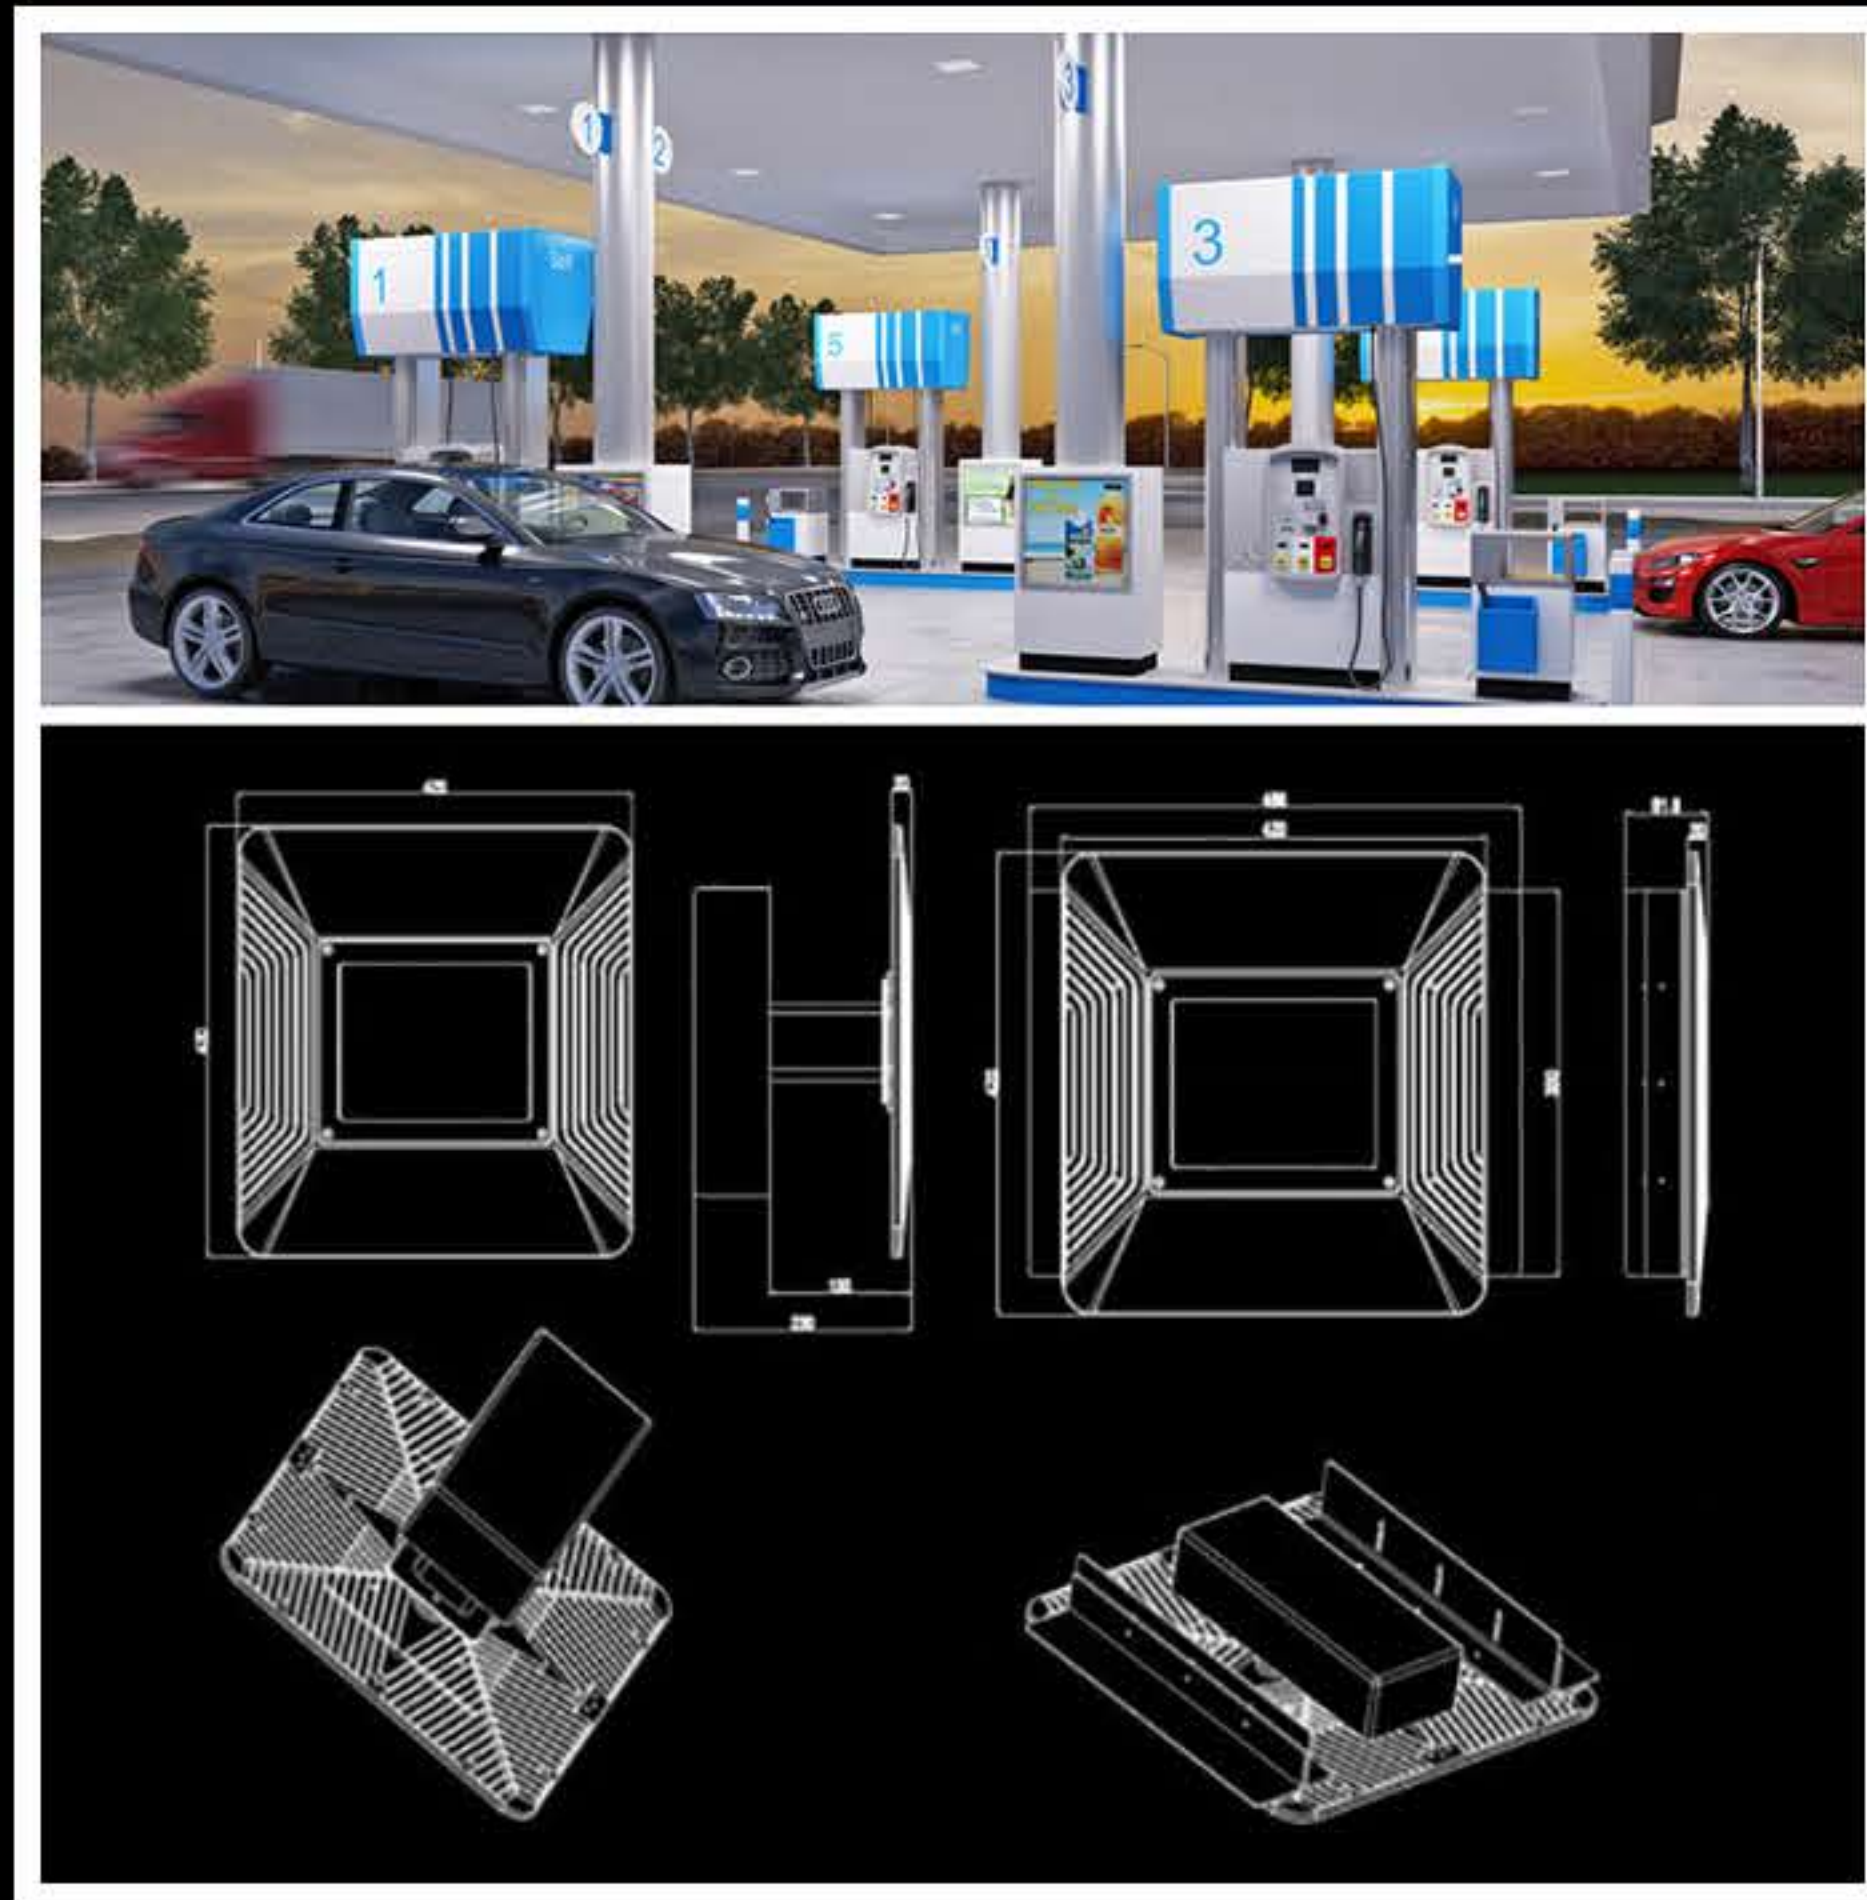

- 1 Driver**
Constant current MeanWell driver. MTBF 30,000 hours, Power Factor >0.95.
- 2 LED Source**
PHILIPS high efficiency LED Chips equally arrayed to ensure uniform light distribution and increased brightness. Colour rendition >78Ra.
- 3 Optic**
Specialist wide angle 120degree optic for optimum light distribution.
- 4 General Design Features**
Option to automatically dim to a pre-set level when no activity. If vehicle/person is present canopy operates at full output. When vehicle leaves, canopy light remains at full output for the programmed time. IP66 design.



Lumilow
Lighting

w. www.lumilow.com

e. sales@lumilow.com

t. +44 (0) 1422 343566

f. +44 (0) 1422 347870

a. Stoney Royd, Swan Bank Lane, Halifax, West Yorkshire, HX3 9HT