




LL24 Series LED Tubes - Glass

Excellent replacement for T8 Tubes,
ofering an enhanced life span, light
output and reduced energy consumption.

RoHS **CE** **TUV**

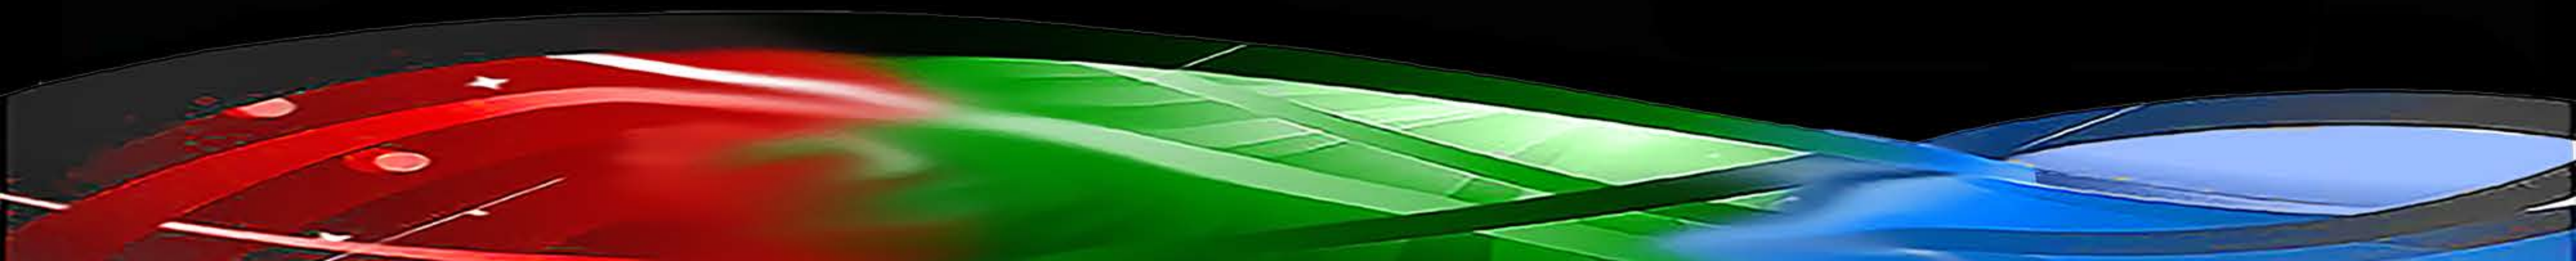

Specifications




Size (mm)	Power	Input Voltage	IP Rating	LED Source	CRI	Colour Temp	Lumens	Beam Angle	Dimmable
600	10W	AC110-277V 50/60Hz	IP20	2835 SMD	≥80Ra	3000K 4000K 6500K	870lm 930lm 1000lm	280°	No
1200	20W	AC110-277V 50/60Hz	IP20	2835 SMD	≥80Ra	3000K 4000K 6500K	1740lm 1860lm 2000lm	280°	No
1500	24W	AC110-277V 50/60Hz	IP20	2835 SMD	≥80Ra	3000K 4000K 6500K	2200lm 2250lm 2300lm	280°	No
1800	30W	AC110-277V 50/60Hz	IP20	2835 SMD	≥80Ra	3000K 4000K 6500K	2600lm 2850lm 3000lm	280°	No



L1 (mm)	L2 (mm)
588	602
1198	1212
1500	1513
1786	1800



Design

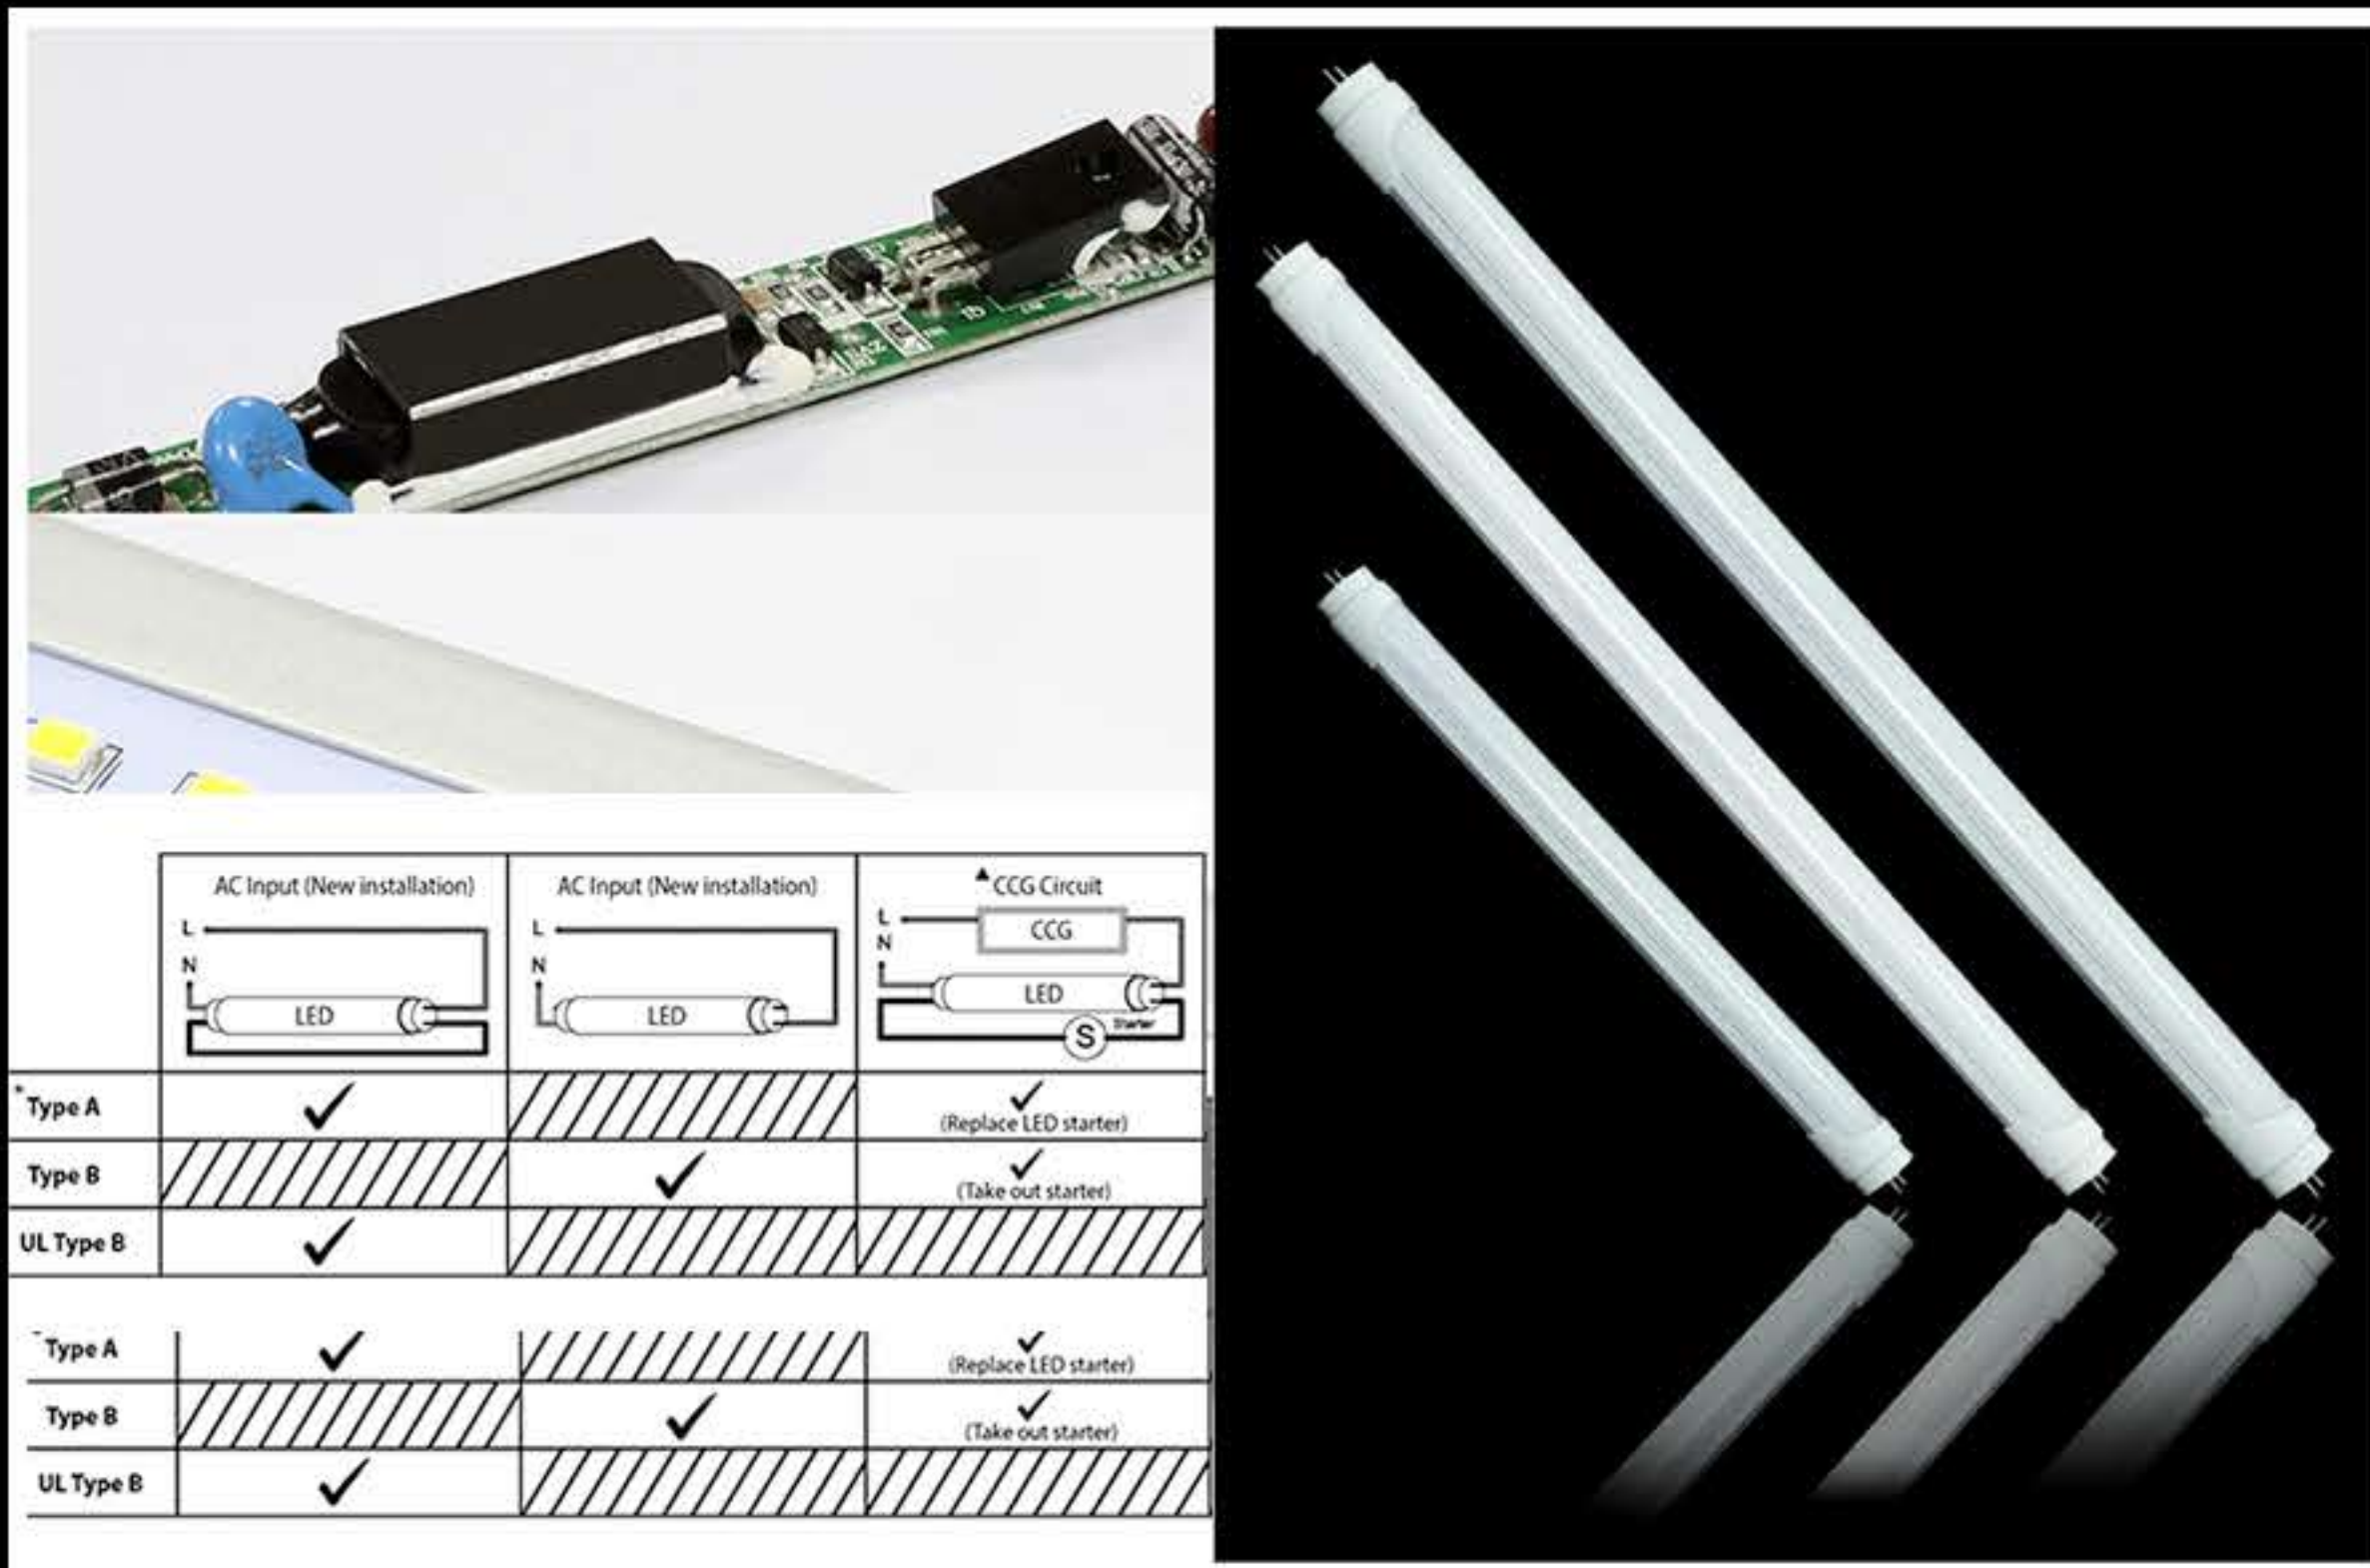

- 1 Driver**
Isolated power supply 470mA constant electrical current input. No UV, no IR, flicker-free. TUV, CE & RoHS certification. Power Factor >0.9, MTBF >50,000hrs.
- 2 LED Source**
SMD LED2835 Chips equally arrayed to ensure uniform light distribution and higher brightness adhering to LM79 and LM80. Lifespan >50,000hrs to L70.
- 3 General Design Features**
2ft, 4ft, 5ft & 6ft Glass LED tubes available. End Caps have excellent high temperature performance and impact resistance.



Lumilow
Lighting

w. www.lumilow.com

e. sales@lumilow.com

t. +44 (0) 1422 343566

f. +44 (0) 1422 347870

a. Stoney Royd, Swan Bank Lane, Halifax, West Yorkshire, HX3 9HT