




LL27 Series School Fitting

LED commercial surface fitting suitable for multiple applications including offices, classrooms and corridors.


RoHS CE TÜV

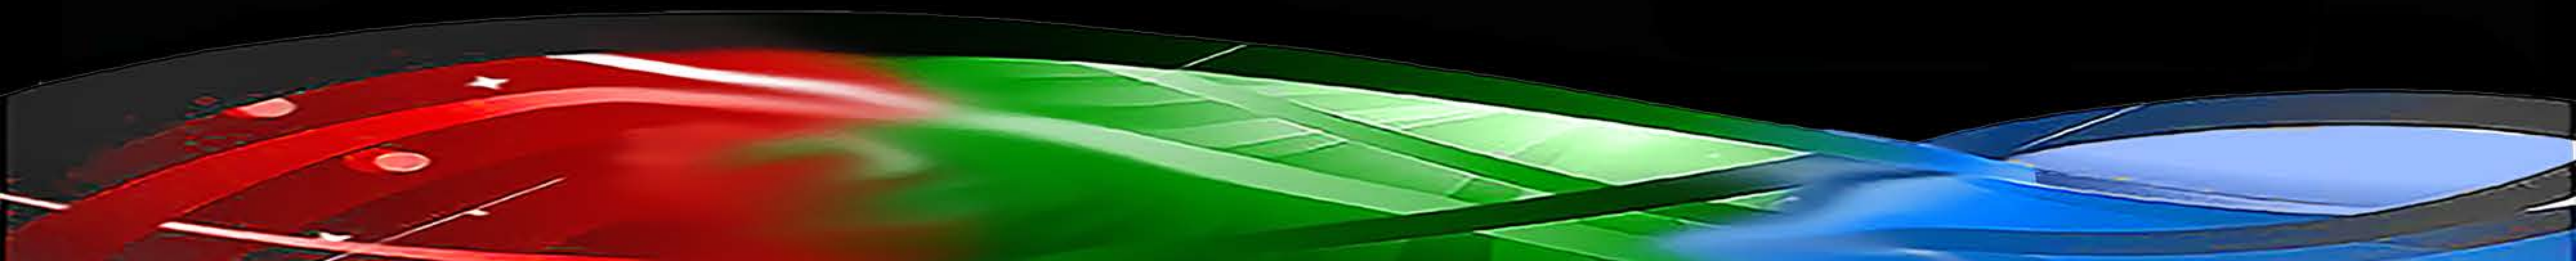

Specifications



Size (mm)	Power	Input Voltage	IP Rating	LED Source	CRI	Colour Temp	Lumens	Beam Angle	Dimmable	Suitable Replacement for:
1200	22W	AC220-240V 50/60Hz	IP40 IP44	2835 SMD OSRAM	≥83Ra	3000K 4000K	2300lm	120°	Dimmable versions available	1x36W T8
1200	41W	AC220-240V 50/60Hz	IP40 IP44	2835 SMD OSRAM	≥83Ra	3000K 4000K	4500lm	120°	Dimmable versions available	2x36W T8
1200	65W	AC220-240V 50/60Hz	IP40 IP44	2835 SMD OSRAM	≥83Ra	3000K 4000K	7500lm	120°	Dimmable versions available	2x54W T5
1500	34W	AC220-240V 50/60Hz	IP40 IP44	2835 SMD OSRAM	≥83Ra	3000K 4000K	3500lm	120°	Dimmable versions available	1x58W T8
1500	65W	AC220-240V 50/60Hz	IP40 IP44	2835 SMD OSRAM	≥83Ra	3000K 4000K	6800lm	120°	Dimmable versions available	2x58W T8

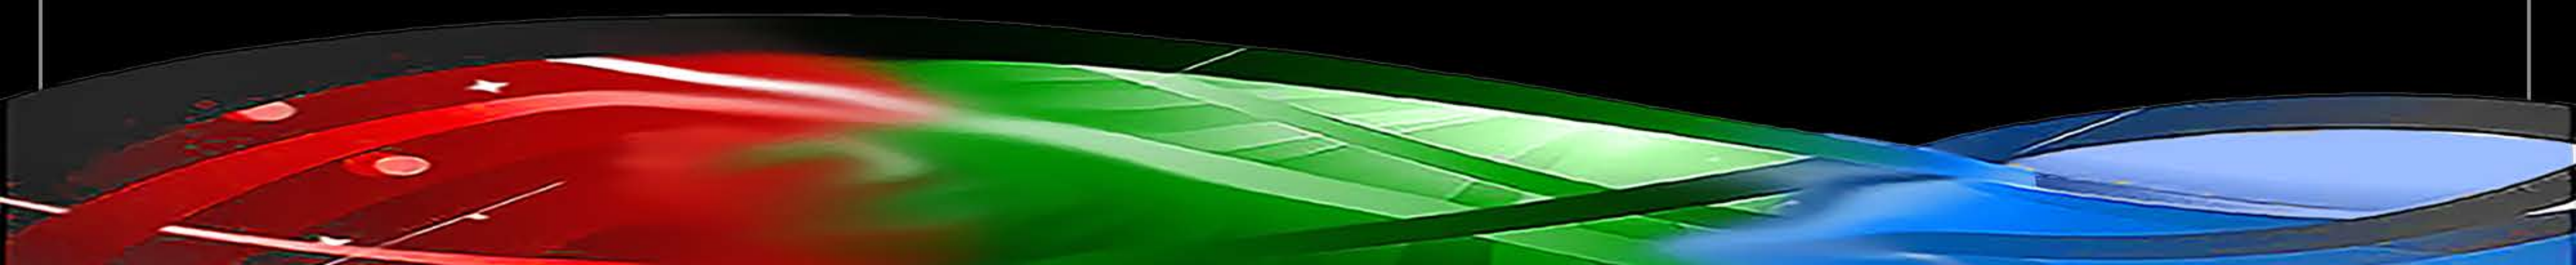

Design



- 1 Driver**
Isolated power supply 470mA constant electrical current input. No UV, no IR, flicker-free. TUV, CE & RoHS certification. Power Factor >0.9, MTBF >50,000hrs. 1-10V dimmable or DALI dimmable versions available.
- 2 LED Source**
SMD LED 2835 OSRAM Chips equally arrayed to ensure uniform light distribution and higher brightness adhering to LM79 & LM80. Lifespan >50,000hrs to L70.
- 3 General Design Features**
4ft and 5ft versions available, with either IP40 or IP44 ingress protection. Semi-opal PMMA diffuser. Fitting can be either surface mounted or suspended.



Lumilow
Lighting

w. www.lumilow.com

e. sales@lumilow.com

t. +44 (0) 1422 343566

f. +44 (0) 1422 347870

a. Stoney Royd, Swan Bank Lane, Halifax, West Yorkshire, HX3 9HT